

PRODUCT DATA SHEET

Fiber Optic Fan Out Pigtail

Features:

Configuration: 4, 6, 8, 12 Pigtails are deployed in a single bundle.
24, 48, 96 pigtail bundles come in sub-unitized 12pigtails/buffer cable.

Applicable connector: FC, SC, ST, LC...

Single-mode or Multi-mode

Jacket: PVC, LSZH

Buffer size: Φ 0.9mm

Application:


Testing equipment

FTTX+LAN

Optical fiber CATV

Optical communication system

Telecommunication

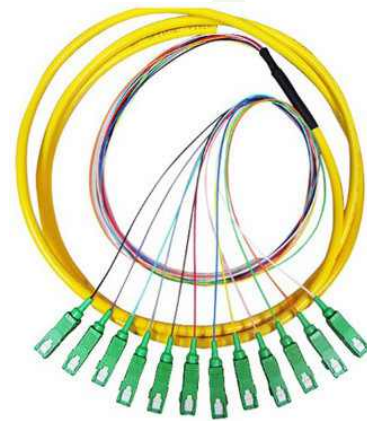

Parameter	Unit	FC, SC, LC				ST, MU		
		SM			MM	SM		MM
		PC	UPC	APC	PC	PC	UPC	PC
Insertion loss(typical)	dB	=0.3	=0.2	=0.3	=0.2	=0.3	=0.2	=0.2
Return loss	dB	=45	=50	=60	=30	=45	=50	=30
Operating wavelength	nm	1310, 1510				1310, 1510		
Exchangeability	dB	=0.2				=0.2		
Vibration	dB	=0.2				=0.2		
Operating temperature	?	-40~75				-40~75		
Storage temperature	?	-45~85				-45~85		
Cable diameter	mm	ϕ 3.0, ϕ 2.0, ϕ 0.9				ϕ 3.0, ϕ 2.0, ϕ 0.9		