

PRODUCT DATA SHEET

LC/PC Fast Connector

Features:

- Low insertion loss
- High return loss
- High reliability and stability

Type:

- Pre-buried

Specification:



- Insertion Loss: $IL \leq 0.5 \text{ dB}$
- Return Loss: $RL \geq 45 \text{ dB}$

Operating Environment:

- Operating Temperature: $-40^\circ\text{C} \sim 85^\circ\text{C}$
- Thermal Cycle: $IL \leq 0.5 \text{ dB}$
- Vibration: $IL \leq 0.5 \text{ dB}$

Product Standard:

Length: 34.8mm
Width: 5.8mm
Height: 5.5mm

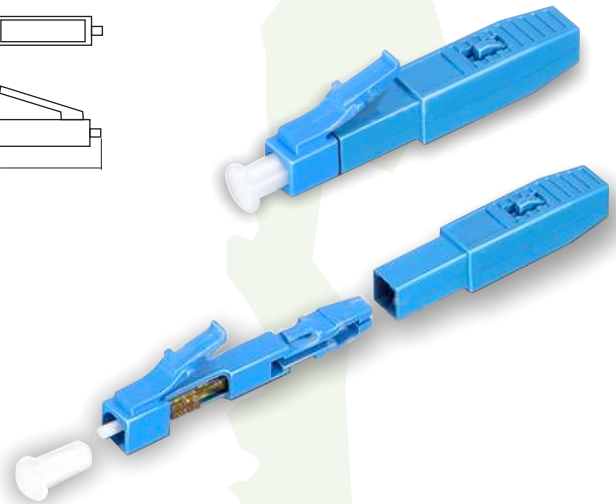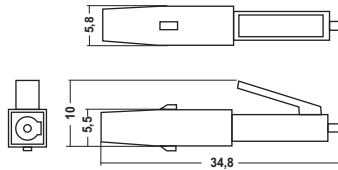

LC/APC Fast Connector

Features:

- Low insertion loss
- High return loss
- High reliability and stability

Specification:

- Insertion Loss: $IL \leq 0.5 \text{ dB}$
- Return Loss: $RL \geq 50 \text{ dB}$

Operating Environment:

- Operating Temperature: $-40^\circ\text{C} \sim 85^\circ\text{C}$
- Thermal Cycle: $IL \leq 0.5 \text{ dB}$
- Vibration: $IL \leq 0.5 \text{ dB}$

