

PRODUCT DATA SHEET

Fiber Optic Terminal Box

Fiber optic terminal box suitable for optical fiber splicing, distribution and protection. It is reasonable design for fiber arrangement, and for outdoor wall mounted and pole mounted application.

Features:

- Material: PP +GF
- Can load up to 24pcs SC simplex adapter and up to 4 splice trays
- Each splice tray can put 1pc 1:8 or 1:4 PLC steel tube type splitter.
- 2 or 4pcs Φ 18mm entry cable ports (with 2pcs Φ 12mm gasket) & up to 24 pcs 4mm drop cable ports
- Wall mounting and pole mounting application
- Waterproof, IP66, outdoor using



Specification:

Model	Capacity	Dimension
NTOTB-XXP08Dz	8 Drops/adapters (1 splice tray)	411 x 243 x 143 mm
NTOTB-XXP16Dz	16 Drops/adapters (2 splice tray)	411 x 243 x 143 mm
NTOTB-XXP24Dz	24 Drops/adapters (3 splice tray)	411 x 243 x 143 mm


Ports XX: 02, 04

Connector Adapter z: SC/APC(A), SC/UPC(U)


Application:

- FTTH access network.
- Telecommunication Networks
- CATV Networks
- Data communications Networks

Dimension: (mm)

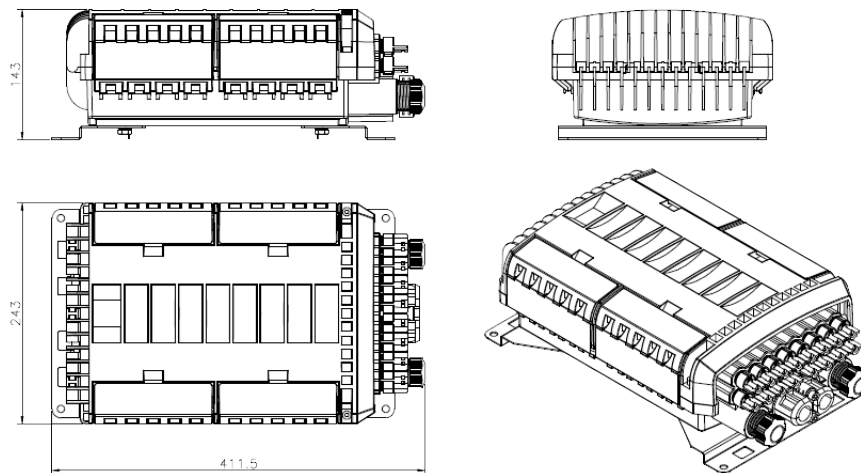


Instruction:

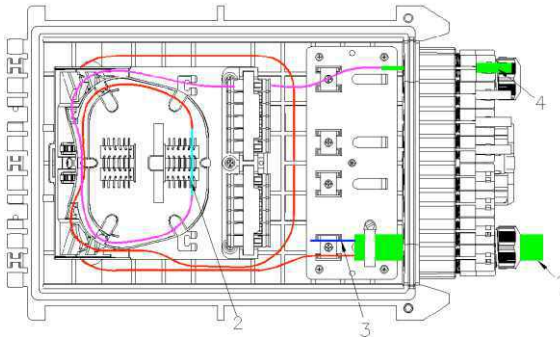

- 1-Cable entry port
- 2-Heat shrinkable protection sleeve
- 3-Cable fixing kit
- 4-Fiber optic fast connector (can get through output port)

Wall-mount and pole mount bracket:

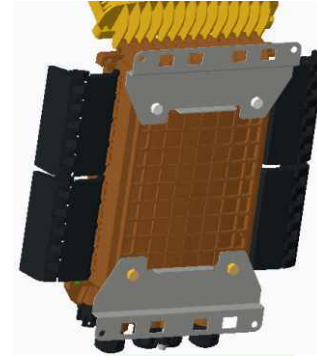

Accessories:

Item	Name	Specification	Unit	Qty
1	Clamp	18-32 stainless steel	PCS	4
2	Inner hexagon spanner	S5, black	PCS	1
3	Cable tube	Outside Φ 6mm, plastic, white	Meter	0.5
4	Expansion screw	M8*70 stainless steel	PCS	4
5	Cable tie	3mm*120mm, white	PCS	5
6	Insulating tape	0.15*17mm*8 yard, black	PCS	1
7	Cleaning cloth	6*6/5050 type	PCS	1
8	Heat shrinkable protect sleeve	60MM*2.3*1.0	PCS	24 or 48



Packing information:

Carton dimension (CM)	Weight (KG)	Remark
Inner carton 42*25.5*15CM	4.4	1 set per carton
Outside carton 53*43.5*33CM	17.6	4 sets per carton

